

# Plug-in Vision Series

## Addendum for Flush Mount Installation

This addendum is intended for use with flush mount modified fixtures. Please see enclosed main manual for standard installation instructions, best practices, and product precautions.

### Installation Instructions:

Tools required: Screwdriver, drill (optional for wall mount), pencil.

#### **Frame or Artwork Mounting**

1. Remove artwork from wall.
2. Locate then mark top center of artwork with pencil.
3. Locate the Vision Series Mounting Template provided which fits your model (17", 30", 43", or 56"). If needed, fold or cut the mounting template to your selected size.
4. Tape the selected template to the back of artwork near the top, with the centerline matched to the center mark on your artwork.
5. Place Brackets on top of frame, centered with vertical red marks on template taped to frame in Step 4. This sets the horizontal spacing of the Brackets. With a sharp object or pencil, mark the holes through the Brackets. See Figure A.
6. Attach Brackets to the frame/canvas using the black wood screw provided. While a pilot hole is not required, it will aid installation. A pilot hole is recommended for older materials or hardwood. Use approximately 1/16" drill bit for best results.
7. Guide the Mounts into the Brackets. See Figure B.
8. Connect the included power supply to the LED Controller coming from the light. If the power supply is not long enough to reach an outlet, attach the included extension cord.
9. Replace artwork and adjust light placement as necessary.

Figure A

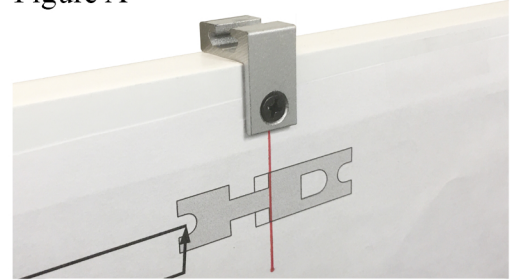


Figure B


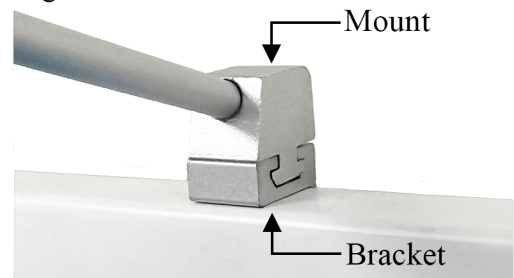


Figure C



Figure D

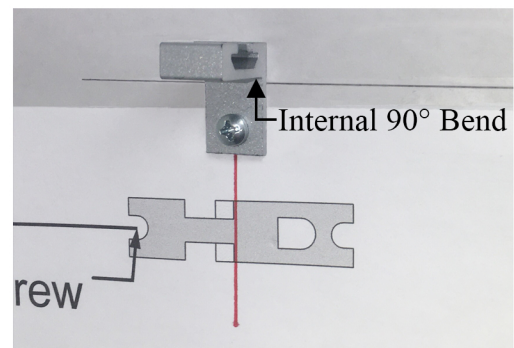

#### **Wall Mounting**

1. Mark the top and center of frame position on wall.
2. Remove artwork from wall.
3. Locate the Vision Series Mounting Template provided which fits your model (17", 30", 43", or 56"). If needed, fold or cut the mounting template to your selected size.
4. Using a level, tape the selected template to the wall with the centerline matched to the center mark on your wall. Place the supplied Bracket over the vertical red marks on the template from Step 3, aligning the internal 90° bend approximately 1/8" above the line drawn in Step 1. See Figure D.  
Note: this distance will vary depending on how your artwork is hung and the clearance required to re-hang artwork.
5. Mark the position of the screw holes in the Brackets. Drill hole in wall using a 3/16" drill bit.
6. Place a dry wall anchor (included) in each hole then attach the Bracket with the silver screw provided. Given the compact design of the Bracket, it may have a tendency to rotate if the screw is not adequately tightened. Please ensure a snug fit of the screw against the Bracket once aligned properly.
7. Guide the Mounts into the Brackets. See Figure B.
8. Connect the included power supply to the LED Controller coming from the light. If the power supply is not long enough to reach an outlet, attach the included extension cord.
9. Replace artwork and adjust light placement as necessary.