

Rechargeable Touch Series

Addendum for Flush Mount Installation

This addendum is intended for use with flush mount modified fixtures. Please see enclosed main manual for standard installation instructions, best practices, and product precautions.

Installation Instructions:

Tools required: Screwdriver, drill (optional for wall mount), pencil.

Note:

Care should be given to ensure centering of Mount within Bracket, as the Mount may shift during placement and removal of Light Bar to the magnetic Neck Assembly. Neck Assembly and Light Bar could release from Mount should they not be interlocked. If this is of concern, a moderate epoxy or metal specific epoxy like JB Weld can be used to adhere the Mount within the Bracket.

Frame or Artwork Mounting

1. Remove artwork from wall.
2. Center Bracket on top of artwork with the beveled mounting hole showing while on the back of the artwork. See Figure A.
3. Attach Bracket to the frame/canvas using the black wood screw provided. While a pilot hole is not required, it will aid installation. A pilot hole is recommended for older materials or hardwood. Use approximately $\frac{1}{16}$ " drill bit for best results.
4. Guide the Mount into the Bracket. See Figure B.
5. Replace artwork and attach Light Bar per instructions on previous page.

Figure A

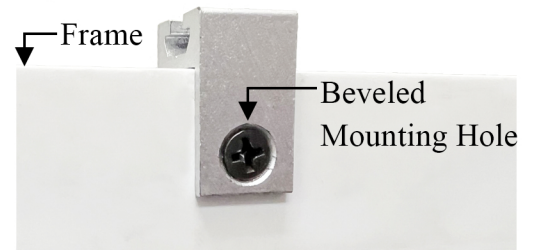


Figure B


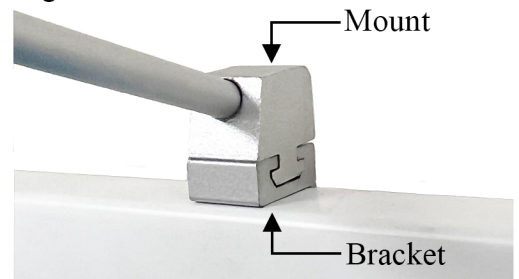


Figure C



Figure D

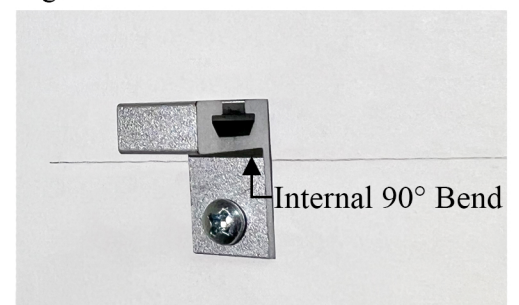

Wall Mounting

1. Mark the top and center of frame position on wall.
2. Remove artwork from wall.
3. Place the supplied Bracket over your mark from Step 1, aligning the internal 90° bend approximately $\frac{1}{8}$ " above the line drawn in Step 1. See Figure D.
Note: this distance will vary depending on how your artwork is hung and the clearance required to re-hang artwork.
4. Mark the position of the screw hole in the Bracket.
5. Drill hole in wall using a $\frac{3}{16}$ " drill bit.
6. Place a dry wall anchor (included) in the hole then attach the Bracket with the silver screw provided. Given the compact design of the Bracket, it may have a tendency to rotate if the screw is not adequately tightened. Please ensure a snug fit of the screw against the Bracket once aligned properly.
7. Guide the Mount into the Bracket. See Figure B.
8. Replace artwork and attach Light Bar per instructions on previous page.